

## Model B 28 | Standard-Incubators with mechanical adjustment


With the B series incubator, you get a reliable and powerful unit in a solid configuration at a very attractive price.

### BENEFITS

- Safe and reproducible results even under high batch throughputs in long-term operation
- Inner glass door for a stable atmosphere



Model 28

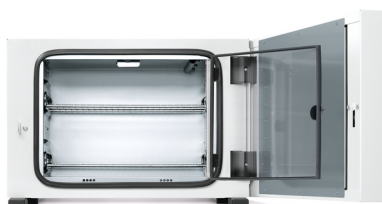

Model 28

### IMPORTANT FEATURES

- Temperature range: +30 °C to +70 °C
- Hydro-mechanical thermostat
- Class 1 temperature limitation device
- Inner door made of tempered safety glass
- 2 chrome-plated racks

### ORDERING INFORMATION

Interior volume [L]	Power supply - unit fuse	Plug*	Version	Model version	Art.-No.
<b>Model B 28</b>					
28	230 V 1~ 50/60 Hz -6,3 A	CEE 7/7	Standard	Bo28-230V	9010-0002
	120 V 1~ 60 Hz -6,3 A	NEMA 5-15	Standard	Bo28-120V	9010-0067


## TECHNICAL DATA

Data			
Designation	Bo28-230V	Bo28-230V-T	Bo28-120V
Article Number	9010-0002	9010-0004	9010-0067
Option model	Standard	with TB class 1	Standard
Performance Data Temperature			
Temperature range	30...70 °C	30...70 °C	30...70 °C
Temperature uniformity at 37°C	1,5 ± K	1,5 ± K	1,5 ± K
Temperature fluctuation at 37°C	1,0 ± K	1,0 ± K	1,0 ± K
Heating up time to 37°C	95 min	95 min	95 min
Electrical data			
Rated Voltage	230 V		120 V
Power frequency	50/60 Hz	50/60 Hz	60 Hz
Nominal power	0,25 kW	0,25 kW	0,25 kW
Unit fuse	6,3 A	6,3 A	6,3 A
Phase (Nominal voltage)	1~	1~	1~
Dimensions and weights			
Interior volume	28 L	28 L	28 L
Net weight of the unit (empty)	23 kg	23 kg	23 kg
Load per rack	10 kg	10 kg	10 kg
Permitted load	25 kg	25 kg	25 kg
Wall clearance back	160 mm	160 mm	160 mm
Wall clearance sidewise	100 mm	100 mm	100 mm
Housing dimensions not incl. fittings and connections			
Width net	580 mm	580 mm	580 mm
Height net	405 mm	405 mm	405 mm
Depth net	425 mm	425 mm	425 mm
Internal Dimensions			
Interior width	400 mm	400 mm	400 mm
Interior height	280 mm	280 mm	280 mm
Interior depth	250 mm	250 mm	250 mm

Unit doors	1	1	1
<b>Fixtures</b>			
Number of shelves (std./max.)	2/4	2/4	2/4

All technical data is specified for unloaded units with standard equipment at an ambient temperature of +22 °C ±3 °C and a power supply voltage fluctuation of ±10%. The temperature data is determined in accordance to BINDER factory standard following DIN 12880, observing the recommended wall clearances of 10 % of the height, width, and depth of the inner chamber. All indications are average values, typical for units produced in series. We reserve the right to change technical specifications at any time.

## DIMENSIONS Incl. fittings and connections [mm]

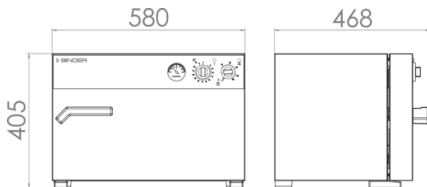

## OPTIONS

Designation	Description	B 28	*	Art.-No.
Calibration certificate, expanded	for temperature; for extending the measurement in center of chamber to include another test temperature	•	-	8012-0022
Calibration certificate, temperature	for temperature, measurement in center of chamber at specified temperature	•	-	8012-0030

## ACCESSORIES

Designation	Description	B 28	*	Art.-No.
pH-neutral detergent	concentrated, for gentle remove of residual contaminants; 1 kg	•	-	8012-2250
Rack	chrome plated	•	-	8012-2032
Rubber pads	set anti-slip feet	•	-	8012-0702
Shelf, perforated	Stainless steel	•	-	8012-2160

## SERVICES

Designation	Description	*	Art.-No.
<b>Calibration services</b>			
Calibration certificate, temperature	Calibration of one (1) test temperature specified by the user in center of chamber, including certificate	-	DL30-0110
	Extension of calibration of one (1) additional test temperature specified by the user in the center of the usable space, including certificate	-	DL30-0102
<b>Installation services</b>			
Unit commissioning	Connect the unit to the customer-side connections (electricity, water, wastewater, gas), basic functions check, brief operating instructions. (excl.: unpacking, setup, controller instructions, programming, installation work)	-	DL10-0100

Designation	Description	*	Art.-No.
Unit instructions	Instruction regarding operating principle and basic functions of the unit, operation of the control electronics including programming	05	DL10-0500
<b>Maintenance contracts</b>			
BRONZE 3-year maintenance contract	Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts	-	DL20-0720
GOLD 3-year maintenance contract	Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts, testing of all key functions, replacement of wear parts, calibration of one test temperature specified by the user in the center of the usable space, including certificate	-	DL20-0915
SILVER 3-year maintenance contract	Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts, testing of all key functions, calibration of one test temperature specified by the user in the center of the usable space, without certificate	-	DL20-0815
<b>Maintenance services</b>			
Maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Calibration of a test temperature specified by the user in center of usable space without certificate	-	DL20-0601
<b>Warranty service</b>			
1-year warranty extension	The warranty is extended by 1 year from the delivery date, wear parts are excluded	-	DL50-0010

**NOTES**

- 05 Quoted prices do not include travel costs. Please refer to the chapter on BINDER Service for travel costs for your region. Quoted prices for services performed in Switzerland do not include a country-specific added fee (available on request).

**BINDER GmbH**

Tuttlingen, Germany  
TEL +49 7462 2005 0  
info@binder-world.com  
www.binder-world.com

**BINDER Inc.**

Bohemia, NY, USA  
TEL +1 631 224 4340  
usa@binder-world.com  
www.binder-world.us

**BINDER Environmental Testing  
Equipment (Shanghai) Co., Ltd.**

Shanghai, P.R. China  
TEL +86 21 685 808 25  
china@binder-world.com  
www.binder-world.com

**BINDER Asia Pacific (Hong Kong) Ltd.**

Kowloon, Hong Kong, P.R. China  
TEL +852 39070500  
asia@binder-world.com  
www.binder-world.com