

Model ED-S 115 | Drying and heating chambers with natural convection

The new products in the Solid.Line impress with their tried-and-tested BINDER quality and reliability. They are suited to drying and heating. The attributes of the Solid.Line are geared towards the application in question and therefore used in research and quality assurance.

BENEFITS

- Easy handling
- Accurate temperature control
- Simple and ergonomic door opening



Model 115

IMPORTANT FEATURES

- Temperature range: +7°C above ambient temperature to +250 °C
- APT.line™ preheating chamber technology
- Natural convection
- Adjustable exhaust air flap
- Controller with timer function
- 1 chrome-plated rack, incl. shelf supports
- Class 2 integrated independent adjustable temperature safety device (DIN 12880) with visual alarm

ORDERING INFORMATION


Interior volume [L]	Power supply - unit fuse	Plug*	Version	Model version	Art.-No.
Model ED-S 115					
118	230 V 1~ 50/60 Hz -6,3 A	CEE 7/7	Standard	EDS115-230V	9090-0020
	120 V 1~ 60 Hz -6,3 A	NEMA 5-15	Standard	EDS115UL-120V	9090-0021

TECHNICAL DATA

Data		
Designation	EDS115-230V	EDS115UL-120V
Article Number	9090-0020	9090-0021
Option model	Standard	Standard
Performance Data Temperature		
Temperature range	+7 °C above ambient temperature to 250 °C	+7 °C above ambient temperature to 250 °C
Temperature uniformity at 150°C	2.8 ± K	2.8 ± K
Temperature fluctuation at 150°C	0.9 ± K	0.9 ± K
Heating up time to 150°C	55 min	55 min
Electrical data		
Rated Voltage	230 V	120 V
Power frequency	50/60 Hz	60 Hz
Nominal power	1,25 kW	1,35 kW
Unit fuse	6,3 A	6,3 A
Phase (Nominal voltage)	1~	1~
Dimensions and weights		
Interior volume	118 L	118 L
Net weight of the unit (empty)	50 kg	50 kg
Load per rack	20 kg	20 kg
Permitted load	75 kg	75 kg
Wall clearance back	160 mm	160 mm
Wall clearance sidewise	100 mm	100 mm
Housing dimensions not incl. fittings and connections		
Width net	764 mm	764 mm
Height net	735 mm	735 mm
Depth net	616 mm	616 mm
Internal Dimensions		
Interior width	550 mm	550 mm
Interior height	550 mm	550 mm
Interior depth	390 mm	390 mm

Unit doors	1	1
Environment-specific data		
Energy consumption at 150°C	300 Wh/h	300 Wh/h
Fixtures		
Number of shelves (std./max.)	1/5	1/5

DIMENSIONS Incl. fittings and connections [mm]

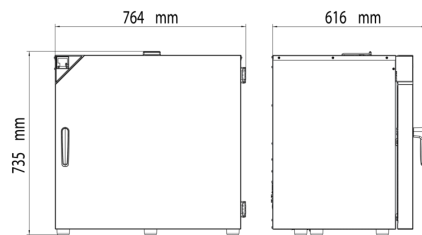

OPTIONS

No data found.

ACCESSORIES

Designation	Description	ED-S 115	*	Art.-No.
Grid shelf	Incl. shelf supports			
	chrome plated	•	-	8012-1808
Rubber pads	set anti-slip feet	•	-	8012-2030
pH-neutral detergent	concentrated, for gentle remove of residual contaminants; 1 kg	•	-	8012-2250

SERVICES

Designation	Description	*	Art.-No.
Calibration services			
Calibration certificate, temperature	Calibration of one (1) test temperature specified by the user in center of chamber, including certificate	-	DL30-0101
	Extension of calibration of one (1) additional test temperature specified by the user in the center of the usable space, including certificate	-	DL30-0102
Temperature measurement, 9 measuring points	Temperature measurement with 9 measuring points with a set value specified by the user, including certificate	-	DL30-0109
Temperature measurement, 27 measuring points	Temperature measurement with 27 measuring points with a set value specified by the user, including certificate	-	DL30-0127
Installation services			

Designation	Description	*	Art.-No.
Unit commissioning	Connect the unit to the customer-side connections (electricity, water, wastewater, gas), basic functions check, brief operating instructions. (excl.: unpacking, setup, controller instructions, programming, installation work)	–	DL10-0100
Unit instructions	Instruction regarding operating principle and basic functions of the unit, operation of the control electronics including programming	–	DL10-0500
Maintenance contracts			
BRONZE 3-year maintenance contract	Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts	–	DL20-0710
GOLD 3-year maintenance contract	Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts, testing of all key functions, replacement of wear parts, calibration of one test temperature specified by the user in the center of the usable space, including certificate	–	DL20-0910
SILVER 3-year maintenance contract	Maintenance service as contractually agreed, visual inspection of mechanical and electrical components, check of control response, 20% discount on spare parts, testing of all key functions, calibration of one test temperature specified by the user in the center of the usable space, without certificate	–	DL20-0810
Maintenance services			
Maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Calibration of a test temperature specified by the user in center of usable space without certificate	–	DL20-0200
Warranty service			
1-year warranty extension	The warranty is extended by 1 year from the delivery date, wear parts are excluded	–	DL50-0010

BINDER GmbH

Tuttlingen, Germany
TEL +49 7462 2005 0
FAX +49 7462 2005 100
info@binder-world.com
www.binder-world.com

BINDER Inc.

Bohemia, NY, USA
TEL +1 631 224 4340
FAX +1 631 224 4354
usa@binder-world.com
www.binder-world.us

**BINDER Environmental Testing
Equipment (Shanghai) Co., Ltd.**

Shanghai, P.R. China
TEL +86 21 685 808 25
FAX +86 21 685 808 29
china@binder-world.com
www.binder-world.com

BINDER Asia Pacific (Hong Kong) Ltd.

Kowloon, Hong Kong, P.R. China
TEL +852 39070500
FAX +852 39070507
asia@binder-world.com
www.binder-world.com